


## TAPON ELECTROFUSION

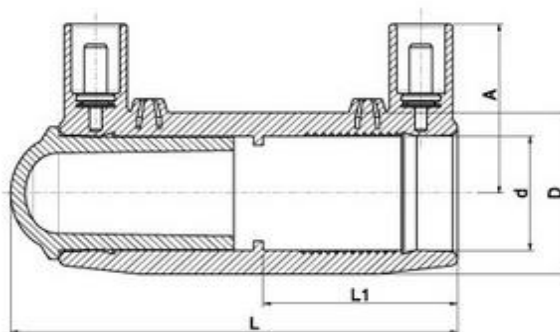

| RANGO        | d [mm] | D [mm] | L [mm] | L1 [mm] | A [mm] |
|--------------|--------|--------|--------|---------|--------|
| SDR 7/SDR 11 | 20     | 31     | 84     | 37      | 34     |
| SDR 7/SDR 11 | 25     | 36     | 92     | 40      | 37     |
| SDR 7/SDR 11 | 32     | 44     | 103    | 42      | 42     |
| SDR 7/SDR 11 | 40     | 56     | 114    | 47      | 46     |
| SDR 7/SDR 11 | 50     | 67     | 121    | 49      | 51     |
| SDR 7/SDR 11 | 63     | 82     | 142    | 57      | 57     |
| SDR 7/SDR 11 | 75     | 98     | 156    | 61      | 64     |
| SDR 7/SDR 11 | 90     | 117    | 183    | 73      | 70     |
| SDR 7/SDR 11 | 110    | 140    | 206    | 78      | 81     |
| SDR 7/SDR 11 | 160    | 194    | 261    | 93      | 105    |
| SDR 7/SDR 11 | 200    | 242    | 289    | 109     | 126    |
| SDR 7/SDR 11 | 250    | 311    | 344    | 123     | 156    |
| SDR 7/SDR 11 | 315    | 387    | 405    | 139     | 184    |
| SDR 7/SDR 11 | 355    | 431    | 277    | 137     | 203    |
| SDR 7/SDR 11 | 400    | 485    | 293    | 145     | 231    |
| SDR 7/SDR 11 | 450    | 539    | 306    | 153     | 257    |
| SDR 7/SDR 11 | 500    | 603    | 340    | 170     | 283    |
| SDR 7/SDR 11 | 560    | 674    | 376    | 188     | 317    |
| SDR 7/SDR 11 | 630    | 759    | 418    | 209     | 356    |
| SDR 7/SDR 11 | 710    | 853    | 472    | 236     | 400    |
| SDR 7/SDR 11 | 800    | 955    | 500    | 250     | 450    |
| SDR 7/SDR 11 | 900    | 1070   | 500    | 250     | 503    |