



FLANGE BRANCK SADDLE ELECTROFUSION

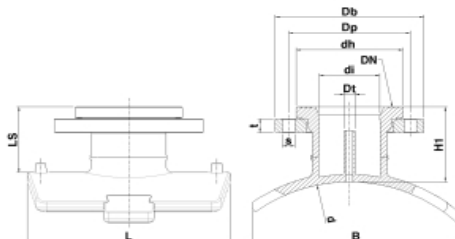

RANGO	d [mm]	D1 [mm]	L [mm]	DN [mm]	Dp [mm]	S [mm]	T [mm]	B	H1 [mm]	di	LS	Dt	Db
SDR 7/SDR 26	450-800	138	300	90	160	18	20	315	117	73	105	16	200
SDR 7/SDR 26	280-400	138	300	90	160	18	20	305	115	73	102	16	200
SDR 7/SDR 26	280-400	158	300	110	180	18	22	309	121	102	110	16	220
SDR 7/SDR 26	450-800	158	300	110	180	18	22	315	123	102	110	16	220
SDR 7/SDR 26	280-400	212	300	160	240	18	24	305	132	131	119	16	285
SDR 7/SDR 26	450-800	212	300	160	240	18	24	315	132	131	121	16	285
SDR 7/SDR 26	500-630	320	420	250	355	26	33	425	206	205	250	16	410
SDR 7/SDR 26	400	268	470	200	295	22	28	377	275	164	250	16	344
SDR 7/SDR 26	400	320	420	250	355	26	33	400	206	205	250	16	410
SDR 7/SDR 26	450	268	470	200	295	22	28	387	275	164	250	16	344
SDR 7/SDR 26	450	320	470	250	355	26	33	405	275	205	250	16	410
SDR 7/SDR 26	450	370	530	300	410	26	40	450	275	259	250	16	467
SDR 7/SDR 26	500	268	470	200	295	22	28	398	275	164	250	16	344
SDR 7/SDR 26	500	370	530	300	410	26	40	460	275	259	250	16	467
SDR 7/SDR 26	560	268	470	200	295	22	28	400	275	164	250	16	344
SDR 7/SDR 26	560	370	530	300	410	26	40	475	275	259	250	16	467
SDR 7/SDR 26	560	482	610	400	525	30	54	510	280	329	250	16	595

FLANGE BRANCK SADDLE ELECTROFUSION

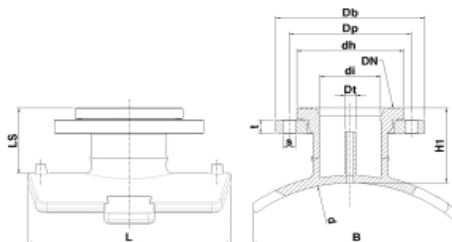

RANGO	d [mm]	D1 [mm]	L [mm]	DN [mm]	Dp [mm]	S [mm]	T [mm]	B	H1 [mm]	di	LS	Dt	Db
SDR 7/SDR 26	630	268	470	200	295	22	28	405	275	164	250	16	344
SDR 7/SDR 26	630	370	530	300	410	26	40	490	275	259	250	16	467
SDR 7/SDR 26	630	482	610	400	525	30	54	520	280	329	250	16	595
SDR 7/SDR 26	710	268	470	200	295	22	28	410	275	164	250	16	344
SDR 7/SDR 26	710	320	470	250	355	26	33	430	275	205	250	16	410
SDR 7/SDR 26	710	370	530	300	410	26	40	500	275	259	250	16	467
SDR 7/SDR 26	710	482	610	400	525	30	54	530	280	329	250	16	595
SDR 7/SDR 26	800	268	470	200	295	22	28	410	275	164	250	16	344
SDR 7/SDR 26	800	320	470	250	355	26	33	430	275	205	250	16	410
SDR 7/SDR 26	800	370	530	300	410	26	40	510	275	259	250	16	467
SDR 7/SDR 26	800	482	610	400	525	30	54	540	280	329	250	16	595
SDR 7/SDR 26	900	212	300	150	240	18	24	318	132	131	120	16	285
SDR 7/SDR 26	900	268	470	200	295	22	28	415	275	164	250	16	344
SDR 7/SDR 26	900	320	470	250	355	26	33	440	275	205	250	16	410
SDR 7/SDR 26	900	370	530	300	410	26	40	530	275	259	250	16	467
SDR 7/SDR 26	900	482	610	400	525	30	54	550	280	329	250	16	595